


DLED Gantry Luminaires - Static White

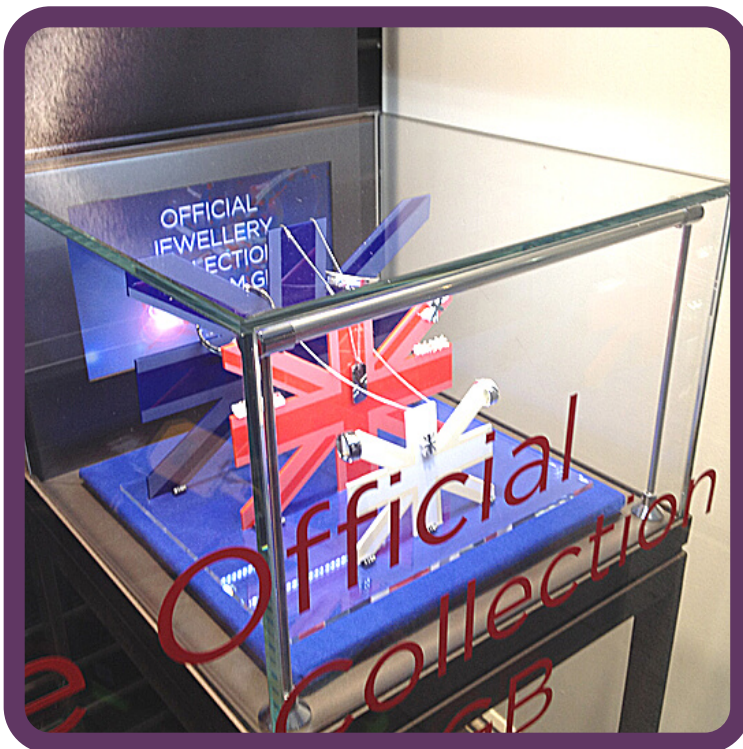


DLED Gantry Luminaires have been designed to be integrated into glass display cases and counters to give a uniform high output illumination eradicating inherent shadows and making your displays sparkle. The circular horizontal LED profile produces a powerful even wash of light and is available with seven different colour temperatures (CCT) to ensure your products are illuminated to their full potential.

- Integrated LEDs.
- Adds 'sparkle' to jewellery, watches and glass.
- Low heat illumination.
- No ultraviolet light so does not fade materials.
- Uniform shadow-free illumination.
- Unobtrusive.
- Bespoke/Made to measure product.
- Reduces heat emissions and heat build-up in store.
- Reduces energy bills by up to 80%.

Technical Specifications

Width:	< 2500mm (measured to fixing centres)
Height:	< 1000mm (visible height)
Material/s:	Aluminium/Brass
Electrical Connection:	Plug & Play Hard Wired (1000mm tails as standard, can be specified)
CCT (Watts/m):	VWW - 2700K (4.8W/m 9.6W/m 19.2W/m) WW - 3000K (4.8W/m 9.6W/m 19.2W/m) NW - 4000K (4.8W/m 9.6W/m 19.2W/m) CW - 6500K (9.6W/m 19.2W/m)
CRI Rating:	CRI90>
Class:	III
IP Rating:	IP20
Adjustment:	LED profile can be rotated and fixed in position
Finishes:	01 - White 02 - Black 11 - Anodised Brushed Silver/Chrome 12 - Anodised Bright Silver/Chrome 13 - Anodised Gold XXX - RAL Colours
Horizontal LED Profile Diameter:	15mm
Tube Support Diameter:	6.50mm
Input Voltage:	24VDC (constant voltage)
Beam Angle:	60 Degrees
Warranty:	3 Years
Dimming:	ON/OFF 1-10V TRIAC DALI DMX Bluetooth (Casambi)
Diffusers:	W - White (50% Opacity) O - Opal (20% Opacity) C - Clear
Ordering:	8 step order code (see page 3)

DLED Gantry Luminaires - Static White



RF Rear Fixing

Diameter: 20mm


Height: 25mm

Fixing: M10 x 50mm Metric Fine Thread with Nut & Washer

Cutout Diameter: 11mm

Material: Brass

Mounting: Vertical or Horizontal



FF Face Fixing (*Hidden Bezel*)

Diameter: 30mm


Height: 25mm

Fixing: Screw Fix

Cutout Diameter: 7mm

Material: Brass

Mounting: Vertical or Horizontal



RFS Small Rear Fixing

Diameter: 20mm


Height: 25mm

Fixing: M8 x 20mm Metric Fine Thread with Nut & Washer

Cutout Diameter: 9mm

Material: Brass

Mounting: Vertical or Horizontal



HF Hidden Fixing (*Floating Cover*)

Diameter: 30mm


Height: 25mm

Fixing: Screw Fix

Cutout Diameter: 7mm

Material: Brass

Mounting: Vertical



HFB Hidden Fixing Bezel

Diameter: 27mm

Height: 12mm





Fixing: Screw Fix (*Underside*)

Cutout Diameter: 7mm

Material: Brass

Mounting: Vertical or Horizontal

DLED Gantry Luminaires - Static White



CP Ceiling Plate

Diameter: 80mm

Height: 20mm

Fixing: Screw Fix Bracket (*Screws not Included*)

Cutout Diameter: Surface Mount

Material: Brass/Steel

Mounting: Vertical or Horizontal

DC Display Clamp

Height: 70mm

Length: 90mm

Fixing: Clamp (5mm to 50mm)

Material: Polycarbonate

Mounting: Vertical or Horizontal

SF 60 Degree Surface Mount Bracket

Width: 20mm

Height: 25mm

Fixing: Screw Fix

Cutout Diameter: Surface Mount

Material: Steel/Brass

Mounting: Vertical or Horizontal

FSB Freestanding Plate with Felt Base

Length: 150mm

Width: 100mm

Height: 3mm

Fixing: Freestanding

Material: Steel

Mounting: Vertical



DLED Gantry Luminaires - Static White

POWER & DIMMING OPTIONS

P&P Plug & Play - Standard On/Off Driver (2m mains lead & UK plug)

P&P/BT: Plug & Play -  Bluetooth Controllable Driver (no mains lead)

Casambi App available for IOS on App Store & Android on Google Play Store

P&P/DA: Plug & Play - 1-10V Dimmable Driver (no mains lead)

P&P/DAP: Plug & Play - 1-10V Dimmable Driver with Pot Dimmer (2m mains lead & UK plug)

P&P/DD: Plug & Play -  Dimmable Driver (no mains lead)

P&P/DT: Plug & Play - Mains (TRIAC) Dimmable Driver (no mains lead)

X: Driver or Dimmer not required (not recommended)

7 STEP ORDERING

	1	2	3	4	5	6	7
MODEL	WIDTH	HEIGHT	DIFFUSER	FIXING	CCT / W	FINISH	POWER
DLED/24	< 2500mm	< 1000mm	W O C	CP	27/4.8	01	P&P
				DC	27/9.6	02	P&P/BT
				FF	27/19.2	11	P&P/DA
				FSB	30/4.8	12	P&P/DAP
				HF	30/9.6	13	P&P/DD
				HFB	30/19.2	XXX (RAL)	P&P/DT
				RF	40/4.8		X
				RFS	40/9.6		
				SF	40/19.2		
					65/9.6		
					65/19.2		

Example Order Code: DLED/24.1000.250.O.FF.40/19.2.12.P&P

