

GPLED Premium Linear Pendant LED




Quality retail lighting systems



DATA SHEET

GPLED/24

Type: Linear Premium

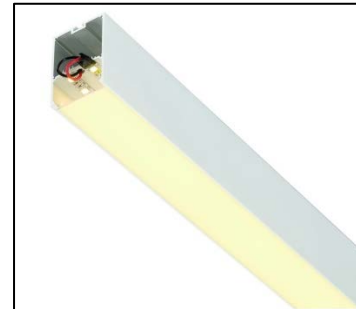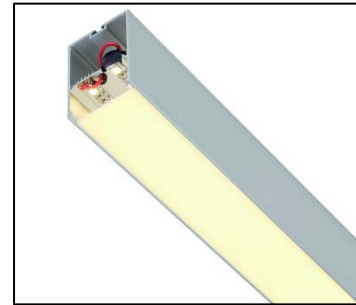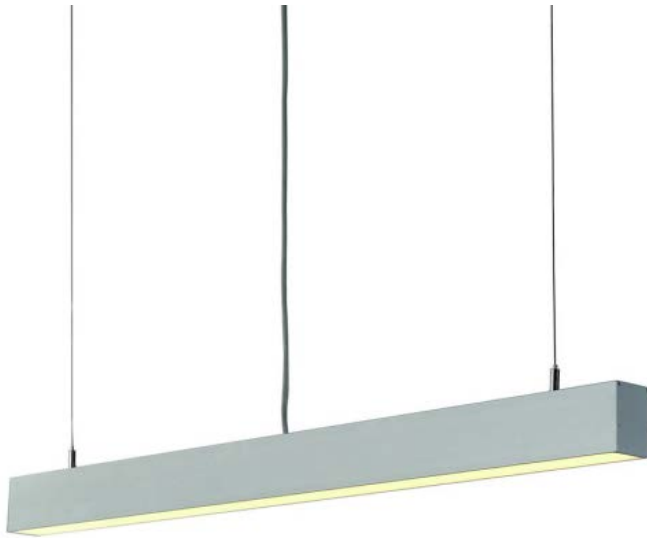

Counter & Showcase Suspended LED Lighting System

Luminaire & LED Specification

Overall Length: < 2000mm

LEDs per Metre: 280 (Philips)

Life Expectancy: 30'000 Hours*

Input Voltage: 24V DC Constant Voltage

Materials: Aluminium / Brass / Acrylic

Beam Angle: 60 Degrees

Finishes: See options below

Power Consumption: 30W per Metre

Fixing: Suspension Set (Length 2.5m)

Dimensions: H70mm x W49mm

T^c 50°C

T^a 40°C

Warranty: 3 Year/s

Suspension Set

GPLED.SS



Colour Appearance

Colour Appearance	CCT	CRI	Lumens/Metre (Typ)
Warm White (WW)	3000K	85 +	3080lm
Neutral White (NW)	4000K	85 +	3360lm
Cool White (CW)	5700K	80 +	3220lm
Cool/Neutral White Mix (CN)	5700K/4000K	80 +	3300lm

Tel: 0161 207 3355 fax: 0161 207 3356 www.display-lighting.com

See Displays in a New Light

GPLED Premium Linear Pendant LED

Quality retail lighting systems



DATA SHEET

GPLED/24

Type: Linear Premium

Counter & Showcase Lighting System

Constant Voltage LED Drivers

Luminaires are not guaranteed unless operated with LED driver supplied by Display Lighting Ltd

Model Number	Input Voltage	Output Voltage	Wattage	Dimming
PCV2412	220V – 240V	24V DC	12W	No
PCV2420	220V – 240V	24V DC	20W	No
PCV2420TD	180V – 240V	24V DC	20W	Leading & Trailing Edge
PCV2430TD	180V – 240V	24V DC	28.8W	Leading & Trailing Edge
PCV2436	100V – 240V	24V DC	36W	No
PCV2445TD	180V – 240V	24V DC	43.2W	Leading & Trailing Edge
PCV2460	100V – 240V	24V DC	60W	No
PCV2480TD	180V – 240V	24V DC	80W	Leading & Trailing Edge
PCV24100	100V – 240V	24V DC	100W	No

Constant Voltage power supplies must be wired in parallel in accordance with data sheet accompanying the product.


Ordering

Example code: GPLED/24.1000..CW.12

Type	Length	Fixings & Accessories	Colour Appearance	Finish
GPLED/24	< 2000mm	GPLED.SS	WW - Warm White	01 - White
			NW- Neutral White	11 - Anodised Satin Silver
			CW - Cool White	
			CN – Cool/Neutral	

All DPLED luminaires are manufactured and supplied with 1000mm tails as standard, longer lengths are available to order.
2 pole connectors are available for end to end connection if required, please specify at time of order.

Logo Printing

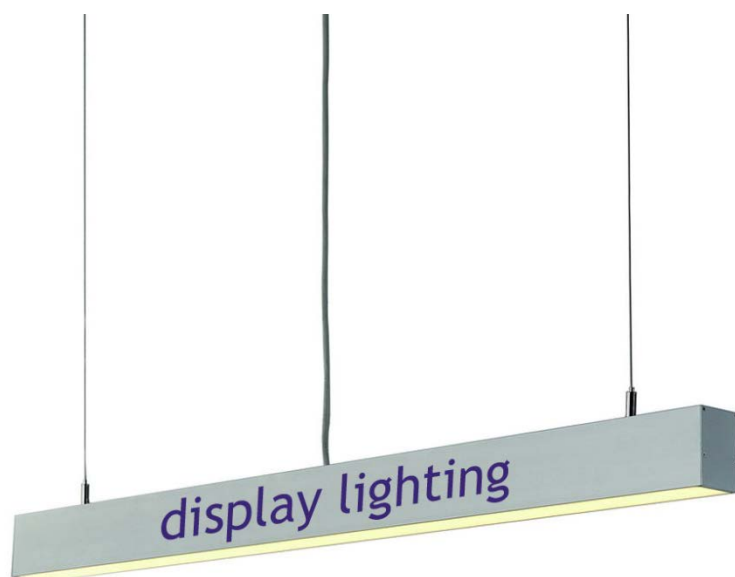

Display Lighting can manufacture GPLED Suspended Pendant Luminaires with your logo or message printed on the front and/or back faces, please contact one of the sales team for details.

Revised: 28th December 2015

ISO 9001 DOC 079

Tel: 0161 207 3355 fax: 0161 207 3356 www.display-lighting.com

See Displays in a New Light