

PyraLED Recessed Downlights




PyraLED is a range of low energy flush mounted shallow LED cluster downlights with very shallow recessed depth and are now available from Display Lighting, designed to illuminate luxury products especially jewellery.

Features:

- Available with 10, 25, 40 and 60 degree lens options.
- Five standard finishes available + RAL Colours.
- Flush mounting.
- Shallow recessed depth.
- High lumen performance up to 5m.
- Excellent thermal efficiency.
- 5 year warranty.
- 9W - 48W Models available.
- Tuneable White (*colour adjustable*) available on most PyraLED models.

Technical Specifications


Material: Aluminium
Electrical Connection: Hard Wired
Power Factor: 92 >
Chromaticity: 3SDCM
Fixing: Recessed (2 retaining spring clips)
LEDs: CREE (*Integrated Non User Replaceable*)
CRI: 80>
Class: III
IP Rating: IP20
Finishes: White | Black | Chrome | Brushed Chrome | Gold | RAL Colours
Input Voltage: 220-240VAC
Warranty: 5 Years

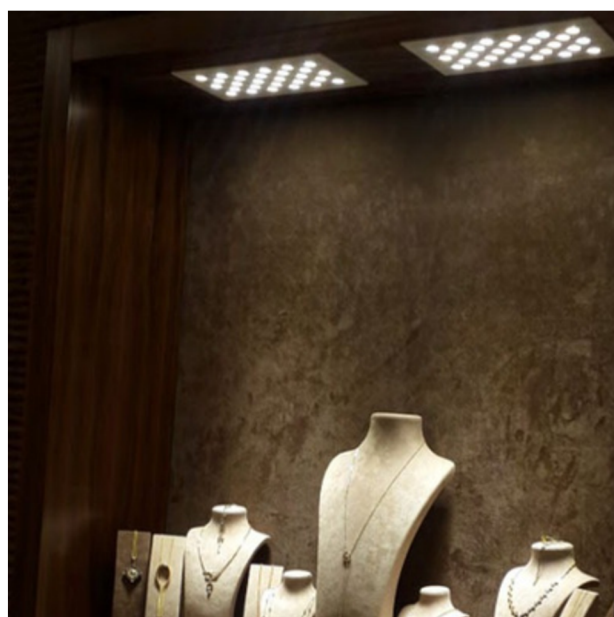

PyraLED C06




Diameter: 120mm
Cutout: 110mm
Height: 35mm
Recessed Depth: 55mm
Watts: 11W
Lumens: 1606lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C06/LG (Low Glare)




Diameter: 120mm
Cutout: 110mm
Height: 42mm
Recessed Depth: 62mm
Watts: 11W
Lumens: 1606lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C06-TW (Tuneable White)




Diameter: 120mm
Cutout: 110mm
Height: 35mm
Recessed Depth: 55mm
Watts: 11W
Lumens: 1606lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C06/LG-TW (Low Glare & Tuneable White)




Diameter: 120mm
Cutout: 110mm
Height: 42mm
Recessed Depth: 62mm
Watts: 11W
Lumens: 1606lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C12




Diameter: 155mm
Cutout: 140mm
Height: 42mm
Recessed Depth: 62mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C06/LG (Low Glare)




Diameter: 120mm
Cutout: 110mm
Height: 49mm
Recessed Depth: 69mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C12-TW (Tuneable White)




Diameter: 155mm
Cutout: 140mm
Height: 42mm
Recessed Depth: 62mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C12/LG-TW (Low Glare & Tuneable White)




Diameter: 155mm
Cutout: 140mm
Height: 49mm
Recessed Depth: 69mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C20




Diameter: 190mm
Cutout: 170mm
Height: 38mm
Recessed Depth: 58mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C20/LG (Low Glare)




Diameter: 190mm
Cutout: 170mm
Height: 45mm
Recessed Depth: 65mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C20-TW (Tuneable White)




Diameter: 190mm
Cutout: 170mm
Height: 38mm
Recessed Depth: 58mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C20/LG-TW (Low Glare & Tuneable White)




Diameter: 190mm
Cutout: 170mm
Height: 45mm
Recessed Depth: 65mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28




Diameter: 230mm
Cutout: 200mm
Height: 50mm
Recessed Depth: 70mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28/LG (Low Glare)




Diameter: 230mm
Cutout: 200mm
Height: 55mm
Recessed Depth: 75mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28-TW (Tuneable White)




Diameter: 230mm
Cutout: 200mm
Height: 50mm
Recessed Depth: 70mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28/LG-TW (Low Glare & Tuneable White)




Diameter: 230mm
Cutout: 200mm
Height: 55mm
Recessed Depth: 55mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED CR20




Diameter: 200mm
Cutout: 180mm
Height: 58mm
Recessed Depth: 78mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED CR20/LG (Low Glare)




Diameter: 200mm
Cutout: 180mm
Height: 65mm
Recessed Depth: 85mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C20-TW (Tuneable White)




Diameter: 200mm
Cutout: 180mm
Height: 58mm
Recessed Depth: 78mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C20/LG-TW (Low Glare & Tuneable White)




Diameter: 200mm
Cutout: 180mm
Height: 65mm
Recessed Depth: 85mm
Watts: 35W
Lumens: 5110lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED CR28




Diameter: 240mm
Cutout: 210mm
Height: 72mm
Recessed Depth: 92mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED CR28/LG (Low Glare)




Diameter: 240mm
Cutout: 210mm
Height: 79mm
Recessed Depth: 99mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28-TW (Tuneable White)




Diameter: 240mm
Cutout: 180mm
Height: 72mm
Recessed Depth: 92mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED C28/LG-TW (Low Glare & Tuneable White)




Diameter: 240mm
Cutout: 210mm
Height: 79mm
Recessed Depth: 99mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED R11




Outer Dimensions: 312mm x 62mm
Cutout: 300mm x 55mm
Height: 34mm
Recessed Depth: 54mm
Watts: 19W
Lumens: 2774lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED R11/LG (Low Glare)




Outer Dimensions: 312mm x 62mm
Cutout: 300mm x 55mm
Height: 41mm
Recessed Depth: 61mm
Watts: 19W
Lumens: 2774lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28-TW (Tuneable White)




Outer Dimensions: 312mm x 62mm
Cutout: 300mm x 55mm
Height: 34mm
Recessed Depth: 54mm
Watts: 19W
Lumens: 2774lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28/LG-TW (Low Glare & Tuneable White)




Outer Dimensions: 312mm x 62mm
Cutout: 300mm x 55mm
Height: 41mm
Recessed Depth: 61mm
Watts: 19W
Lumens: 2774lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED R14




Outer Dimensions: 260mm x 100mm
Cutout: 245mm x 90mm
Height: 40mm
Recessed Depth: 60mm
Watts: 25W
Lumens: 3650lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED R11/LG (Low Glare)




Outer Dimensions: 260mm x 100mm
Cutout: 245mm x 90mm
Height: 47mm
Recessed Depth: 67mm
Watts: 25W
Lumens: 3650lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28-TW (Tuneable White)




Outer Dimensions: 260mm x 100mm
Cutout: 245mm x 90mm
Height: 40mm
Recessed Depth: 60mm
Watts: 25W
Lumens: 3650lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28/LG-TW (Low Glare & Tuneable White)




Outer Dimensions: 260mm x 100mm
Cutout: 245mm x 90mm
Height: 47mm
Recessed Depth: 67mm
Watts: 25W
Lumens: 3650lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED R28




Outer Dimensions: 330mm x 180mm
Cutout: 290mm x 150mm
Height: 46mm
Recessed Depth: 66mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (*Non User Replaceable*)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED R11/LG (*Low Glare*)




Outer Dimensions: 330mm x 180mm
Cutout: 290mm x 150mm
Height: 58mm
Recessed Depth: 78mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (*Non User Replaceable*)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28-TW (*Tuneable White*)




Outer Dimensions: 330mm x 180mm
Cutout: 290mm x 150mm
Height: 46mm
Recessed Depth: 66mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (*Casambi*)
LEDs: CREE (*Non User Replaceable*)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED C28/LG-TW (*Low Glare & Tuneable White*)




Outer Dimensions: 330mm x 180mm
Cutout: 290mm x 150mm
Height: 58mm
Recessed Depth: 78mm
Watts: 50W
Lumens: 7008lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (*Casambi*)
LEDs: CREE (*Non User Replaceable*)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S12




Outer Dimensions: 150mm x 150mm
Cutout: 130mm x 130mm
Height: 39mm
Recessed Depth: 59mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED S12/LG (Low Glare)




Outer Dimensions: 150mm x 150mm
Cutout: 130mm x 130mm
Height: 46mm
Recessed Depth: 66mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S12-TW (Tuneable White)




Outer Dimensions: 150mm x 150mm
Cutout: 130mm x 130mm
Height: 39mm
Recessed Depth: 59mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S12/LG-TW (Low Glare & Tuneable White)




Outer Dimensions: 150mm x 150mm
Cutout: 130mm x 130mm
Height: 46mm
Recessed Depth: 66mm
Watts: 22W
Lumens: 3212lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S30




Outer Dimensions: 220mm x 220mm
Cutout: 200mm x 200mm
Height: 58mm
Recessed Depth: 78mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S30/LG (Low Glare)




Outer Dimensions: 220mm x 220mm
Cutout: 200mm x 200mm
Height: 68mm
Recessed Depth: 88mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 3000K | 4000K | 5000K | 6500K
IP Rating: IP20
Dimming: ON/OFF | TRIAC | 0/1-10V | Bluetooth | DMX | RF
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC




PyraLED S30-TW (Tuneable White)




Outer Dimensions: 220mm x 220mm
Cutout: 200mm x 200mm
Height: 58mm
Recessed Depth: 78mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimming: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED S30/LG-TW (Low Glare & Tuneable White)



Outer Dimensions: 220mm x 220mm
Cutout: 200mm x 200mm
Height: 68mm
Recessed Depth: 88mm
Watts: 50W
Lumens: 7300lm
Luminous Efficacy: 146lm/W
Beam Angle Options: 10° | 25° | 40° | 60°
CCT Options: 2700K - 6500K Tuneable White
IP Rating: IP20
Dimmable: ON/OFF | Bluetooth (Casambi)
LEDs: CREE (Non User Replaceable)
Material/s: Aluminium
Voltage: 220-240VAC



PyraLED Recessed Downlights

POWER & DIMMING OPTIONS

P&P/BT: Plug & Play -  Bluetooth Controllable Driver (*no mains lead*)

[Casambi App](#) available for IOS on App Store & Android on Google Play Store

P&P/DA: Plug & Play - 1-10V Dimmable Driver (*no mains lead*)

P&P/DD: Plug & Play -  Dimmable Driver (*no mains lead*)

P&P/DT: Plug & Play - Mains (TRIAC) Dimmable Driver (*no mains lead*)

P&P/OO: Plug & Play - On/Off Driver (*no mains lead*)

PYRALED - SINGLE COLOUR TEMPERATURE

	1	2	3	4
MODEL	CCT	BEAM ANGLE	FINISH	POWER
PYRALED-C06	WW 3000K	10	01	P&P/BT
PYRALED-C12	NW 4000K	25	02	P&P/DA
PYRALED-C20	CW 5000K	40	03	P&P/DD
PYRALED-C28	DW 6500K	60	05	P&P/DT
PYRALED-CR20			13	P&P/OO
PYRALED-CR28			RAL	
PYRALED-R11				
PYRALED-R14				
PYRALED-R28				
PYRALED-S12				
PYRALED-S30				



PYRALED - TUNEABLE WHITE



	1	2	3	4
MODEL	CCT	BEAM ANGLE	FINISH	POWER
PYRALED-C06	TW 2700K - 6500K	10	01	P&P/BT
PYRALED-C12		25	02	
PYRALED-C20		40	03	Casambi App required.
PYRALED-C28		60	05	
PYRALED-CR20			13	
PYRALED-CR28			RAL	
PYRALED-R11				
PYRALED-R14				
PYRALED-R28				
PYRALED-S12				
PYRALED-S30				