

## DATA SHEET

### Type: 24V Miniature Magnetic Linear Track System




MagTrack II is a versatile magnetic miniature 24V track system that can screw fixed to metal and wooden surfaces and also fixed to glass using VHB acrylic tape. The cool white 2W spotlights are available in a fixed and multi adjustable models and can easily be repositioned on the track giving a 20° focused beam of light onto luxury products.

- Easy to install.
- 2W 4000K Spotlights.
- CRI 90>
- Adds 'sparkle' to luxury goods.
- Low heat illumination.
- No ultraviolet light so does not fade materials.
- Unobtrusive.
- Reduces heat emissions and heat build-up in store.
- Directional focused spotlights.
- Reduces energy bills by up to 80%.

### MagTrack II Spotlight Specification

#### Fixed Spotlight

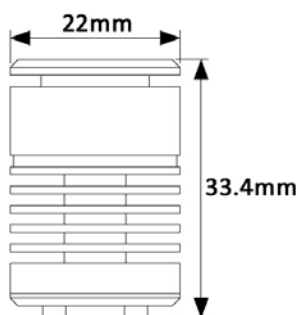

Length: **33.4mm**

Dimming: **N/A**

Diameter: **Ø22mm**

Beam Angle: **20°**

Power Consumption: **2W**

Colour Temperature: **4000K (CRI95>) RA PLUS Technology**

Rotation: **N/A**

Life Expectancy: **30'000 Hours**

Material/s: **Aluminium / Steel**


Adjustment: **N/A**

Input Voltage: **24V DC**

Finishes: **DL6751 Black | DL6768 Silver | DL6775 White**

Lamp: **Integral LED (Non Replaceable)**

#### Adjustable Spotlight

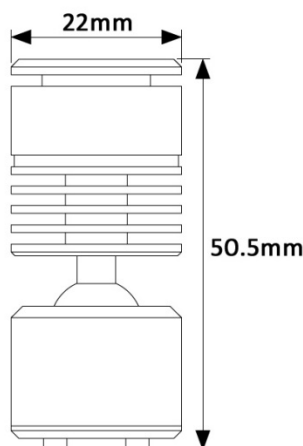

Length: **50.5mm**

Dimming: **N/A**

Diameter: **Ø22mm**

Beam Angle: **20°**

Power Consumption: **2W**

Colour Temperature: **4000K (CRI95>) RA PLUS Technology**

Rotation: **N/A**

Life Expectancy: **30'000 Hours**

Material/s: **Aluminium / Steel**

Adjustment: **N/A**

Input Voltage: **24V DC**

Finishes: **DL6782 Black | DL6799 Silver | DL6805 White**


Lamp: **Integral LED (Non Replaceable)**

Adjustment: **40°**

# MagTrack II - Magnetic Track System

Quality retail showcase lighting systems

## MagTrack II Track



Length (L): **1000mm** (can be cut to size)

Width (W): **18mm**

Depth (D): **6mm**

Material/s: **Polycarbonate/Steel**

Voltage: **24V DC**

Finishes: **DL6812 Black | DL6829 Silver | DL6843 White**


Class: **III**

Power Rating: **5A**

Dimming: **N/A**

Fixing: **Screw Fix or VHB Tape**

## Live Feed / Live Ends

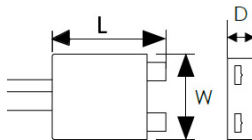

Power Rating: **5A Max**

Finishes: **DL6850 Black | DL6867 Silver | DL6874 White**

Voltage: **24V DC**


Length (L): **24mm**

Width (W): **18mm**

Depth (D): **7mm**

Material: **Polycarbonate/Steel**

## Corner Connectors



Power Rating: **5A**

Finishes: **DL6881 Black | DL6898 Silver | DL6904 White**

Voltage: **24V DC**

Length (L): **26mm**

Width (W): **26mm**

Depth (D): **7mm**


Material: **Polycarbonate/Steel**

## Inline Connectors



Finishes: **DL6911**

## End Caps



Finishes: **DL6928 Black | DL6935 Silver | DL6942 White**

Length (L): **6mm**

Width (W): **18mm**

Depth (D): **7mm**

# MagTrack II - Magnetic Track System

Quality retail showcase lighting systems




## Magnetic Track & Accessories

### Constant Voltage LED Drivers

Model Number	Input Voltage	Output Voltage	Wattage	Dimming
UVC2425TD	180–240VAC (50-60Hz)	24V DC	25W	
PCV2436	100–240VAC (50-60Hz)	24V DC	36W	
UVC2450TD	180–240VAC (50-60Hz)	24V DC	50W	

*Constant Voltage power supplies must be wired in parallel in accordance with data sheet accompanying the product.*

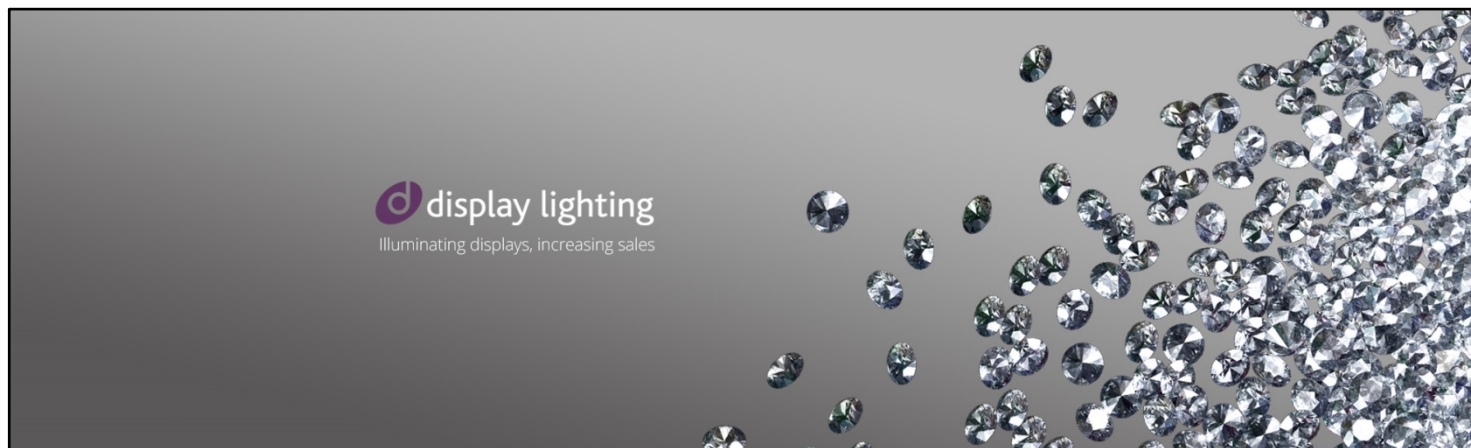

Tel: 0161 207 3355 fax: 0161 207 3356 [www.display-lighting.com](http://www.display-lighting.com)

See Displays in a New Light