

Recessed Spots Adjustable LED>The 1W/2W Mini Series Aluminium

DL11103B/B/W




1W/2W COB LED adjustable recessed spot IP20.

Requires 350mA/700mA driver.

Complies with standard EN60598-1 and any other specific standards.




Dimensions

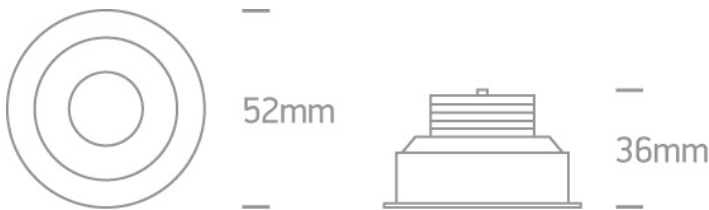


Must be ordered separately




DL89004



DL89004A



DL89004AT



DL89004T

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The 1W/2W Mini Series Aluminium
Order Code	DL11103B/B/W
Colour	Black
Material	Aluminium
Shape	Circular

Height	36mm
Diameter	52mm
Cutout Hole Diameter	45mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/700mA
Safety Class	
Power(Watts)	1W/2W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	200lm@700mA
Light Efficiency	100lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length

9cm

Box Width

6cm

Box Height

5,5cm

Box Weight

0,080kg

Pcs/Carton

100

Barcode

5291889042488

HS Code

9405409900

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes