

SHLP Static White High Density Adjustable Linear Luminaires




A super bright 50W/m linear LED lighting solution manufactured and supplied to exact length producing up to 6950lm/m to jewellery and high end goods creating 3D sparkle.

Available in made to measure lengths up to 2m and in white, black or RAL powder coated finishes and also a contemporary brushed silver finish.

- **SHLP** - Static White
- Integrated LEDs.
- Adds 'sparkle' to jewellery, watches and glass.
- Low heat illumination.
- Uniform shadow-free illumination.
- Unobtrusive.
- Bespoke/Made to measure product.

Technical Specifications

Length:	300mm > < 2000mm (<i>Increments of 40mm</i>)
Width:	40mm
Height:	30mm
Material/s:	Aluminium/Polycarbonate
Electrical Connection:	Plug & Play Hard Wired (<i>1000mm tails as standard</i>)
CCT (Lumens per Metre):	30 - 3000K Warm White 40 - 4000K Neutral White 50 - 5000K Pure White 65 - 6500K Daylight White
Watts per Metre:	50W
Lumens per Metre:	6950lm/m
Fixings:	Screw Fix Metal Clips (<i>Included</i>)
CRI Rating:	CRI80-CRI90
Class:	III
IP Rating:	IP20
Input Voltage:	24VDC (<i>constant voltage</i>)
Beam Angle:	10 25 40 60
Warranty:	5 Years
Dimming:	ON/OFF 1-10V TRIAC DALI DMX Bluetooth (<i>Casambi</i>)
Finish:	01 - White 02 - Black XXX - RAL Colours
Ordering:	5 step order code

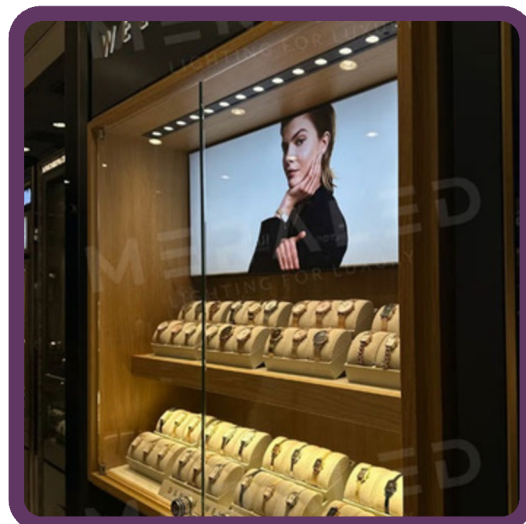

SHLP High Density Static White Adjustable Linear Luminaires

POWER & DIMMING OPTIONS

- P&P** Plug & Play - Standard On/Off Driver (2m mains lead & UK plug)
- P&P/BT:** Plug & Play -  **Bluetooth** Controllable Driver (no mains lead)
[Casambi App available for IOS on App Store & Android on Google Play Store](#)
- P&P/DA:** Plug & Play - 1-10V Dimmable Driver (no mains lead)
- P&P/DAP:** Plug & Play - 1-10V Dimmable Driver with Pot Dimmer (2m mains lead & UK plug)
- P&P/DD:** Plug & Play -  **DALI** Dimmable Driver (no mains lead)
- P&P/DT:** Plug & Play - Mains (TRIAC) Dimmable Driver (no mains lead)
- X:** Driver or Dimmer not required (*not recommended*)

SIX STEP ORDERING

	1	2	3	4	5
MODEL	LENGTH	COLOUR TEMPERATURE	BEAM ANGLE	FINISH	POWER
SLP	< 2000mm	30 40 50 65	10 25 40 60 (Degrees)	01 02 17 XXX (RAL)	P&P P&P/BT P&P/DA P&P/DAP P&P/DD P&P/DT X

Example Order Code: SHLP.1000.40.25.02.**P&P**

NOTES:

